

IO111-I, IO111-I-IS, IO111-O, IO111-O-IS, IO111, IO111-IS ADDRESSABLE INPUT/OUTPUT MODULE



IO111/IO111-X-X Module series is designed to gather inputs from outside of the fire alarm system or provide output to control the devices that indicate alarms or trigger any device connected to the system.

All modules are certified by EN54 standard, which is the European standard (EN54-18 for input/output module, EN54-17 for short-circuit isolator).

IO111-I or IO111-I-IS is used to connect devices from outside the system that need to be included. IO111-I or IO111-I-IS can monitor the fault and alarm status of any device with relay contact. This capability allows devices that are not compatible with the fire panel to be added to the system.

IO111-O or IO111-O-IS can trigger any warning device in response to an alarm occurring in the fire alarm system. It is not affected by a power outage when changing relay direction.

IO111 or IO111-IS monitors the devices connected to its input and can control the desired devices in response to an alarm. It can be programmed as an input-only, output-only, or both input and output module using the programming device.

Each module in the IO111-X-X module series is available in models with and without a built-in isolator. The designation "IS" indicates that the device has a built-in isolator.

Features

- Input/Output Module
- Smart Addressable RAAP Protocol
- Powered by the loop
- Programmable with RB1201
- Two indicator LEDs
- Built-in isolator
- Memory Relay Output
- Open Circuit, Short Circuit and Alarm Detection
- Rail Mount and Wall Mount
- EN54-18 & EN54-17 Certified



EN54-18:2005 + EN54-17:2005

CPR No: 1922-CPR-1948

TECHNICAL SPECIFICATIONS

	IO111/IO111-IS	IO111-I/IO111-I-IS	IO111-O/IO111-O-IS
DESCRIPTION	Input/Output Module	Input Module	Output Module
STANDARDS	EN54-18/17	EN54-18/17	EN54-18/17
LOOP OPERATING VOLTAGE	16 - 30 Vdc	16 - 30 Vdc	16 - 30 Vdc
LOOP OPERATING CURRENT	<150µA @ 24 Vdc	<150µA @ 24 Vdc	<150µA @ 24 Vdc
MAXIMUM ALARM CURRENT	<12mA @ 24 Vdc (LED on)	<12 mA @ 24 Vdc (LED on)	<12 mA @ 24 Vdc (LED on)
RELAY CONTACT STRENGTH	300mA @ 24 Vdc	N/A	300mA @ 24 Vdc
SERIAL RESISTANCE	max. 1 Ohm	max. 1 Ohm	max. 1 Ohm
ADDRESSING MODE	Manuel Addressing	Manuel Addressing	Manuel Addressing

SPECIFICATIONS

SYSTEM WIRING	Min. 0,8 mm ² 2 core loop	Min. 0,8 mm ² 2 core loop	Min. 0,8 mm ² 2 core loop
MOUNTING POSITION	Wall Mount	Wall Mount	Wall Mount
MOUNTING OPTIONS	Surface Mount with Screw Rail Mount with Apparatus	Surface Mount with Screw Rail Mount with Apparatus	Surface Mount with Screw Rail Mount with Apparatus

ISOLATOR SPECIFICATIONS


ISOLATOR TYPE/SWITCH CURRENT	SSCS (A.3) / 230-400mA	SSCS (A.3) / 230-400mA	SSCS (A.3) / 230-400mA
ISOLATOR RECONNECT/LEAKAGE CURRENT	3-13mA / max. 18mA	3-13mA / max. 18mA	3-13mA / max. 18mA
STANDBY CURRENT/SERIAL RESISTANCE	max. 150uA / max. 1 ohm	max. 150uA / max. 1 ohm	max. 150uA / max. 1 ohm

ENVIRONMENTAL SPECIFICATIONS

HUMIDITY	10% - 93% Relative Humidity	10% - 93% Relative Humidity	10% - 93% Relative Humidity
	Non-condensing	Non-condensing	Non-condensing
OPERATING TEMPERATURE	-10°C - 50°C	-10°C - 50°C	-10°C - 50°C
ENVIRONMENTAL CATEGORY	IP21	IP21	IP21

COMPATIBILITY

AP104 ADDRESSABLE FIRE PANEL	Yes	Yes	Yes
AP204 ADDRESSABLE FIRE PANEL	Yes	Yes	Yes
AP304 ADDRESSABLE FIRE PANEL	Yes	Yes	Yes

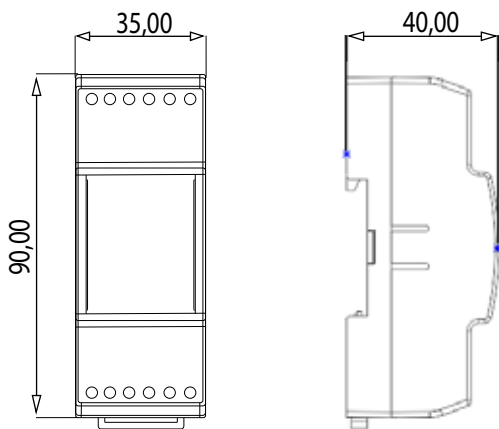

PHYSICAL SPECIFICATIONS

CASE MATERIAL	PC/ABS Case
DIMENSIONS (H x W x D)	90 x 35 x 40 mm
WEIGHT	70 grams